


TRIDAIR LOGO, 1st, AND 2nd DASH NUMBERS STAMPED .010 MAXIMUM DEEP

**NOTES:**

1. MATERIAL: 17-4PH CRES PER AMS5643.
2. HEAT TREAT: CONDITION H1025 PER MIL-H-6875.
3. FINISH: PASSIVATED PER QQ-P-35.
4. MINIMUM ULTIMATE STRENGTHS (CALCULATED):
  - 4.1 TENSILE: 1,600 LBS.
  - 4.2 SINGLE SHEAR: 980 LBS.
5. SCREW TO BE USED WITH CA2210-08R RETAINING RING TO CAPTIVATE TO PANEL.
6. PANEL PREPARATION: REFER TO CAL-STD-0260.
7. RECOMMENDED SEATING TORQUE: 21 TO 32 IN-LBS.
8. PART CALLOUT EXAMPLE:

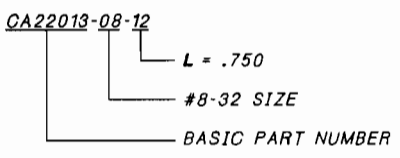

SECOND DASH NUMBER	L
- 8	.500
- 9	.562
- 10	.625
- 11	.687
- 12	.750
- 13	.812
- 14	.875
- 15	.937
- 16	1.000
- 18	1.125
- 20	1.250

10. TOLERANCES, UNLESS OTHERWISE SPECIFIED: DECIMALS: .XX ±.02, .XXX ±.010, ANGLES ±2°.

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
C1	10/21/10	9430

PROJECT NUMBER: 94-084

APPROVED DATE	23 FEB 94
REV. LETTER AND DATE	<del>C</del> 22 FEB 93
ECN NUMBER	<del>EON 00002</del>

**Fairchild** AEROSPACE FASTENER DIVISION  
 ENGINEERING CENTER  
 3000 WEST LOMITA BOULEVARD  
 TORRANCE, CA 90505

CAGE CODE **29372**  
 TRIDAIR PRODUCT

SCREW, CAPTIVE, 82° DOMED HEAD,  
 HEX SOCKET, #8-32 SIZE

**CA22013-08-()**  
 SHEET 1 OF 1