

Voi-Shan • Tridair • Screwcorp

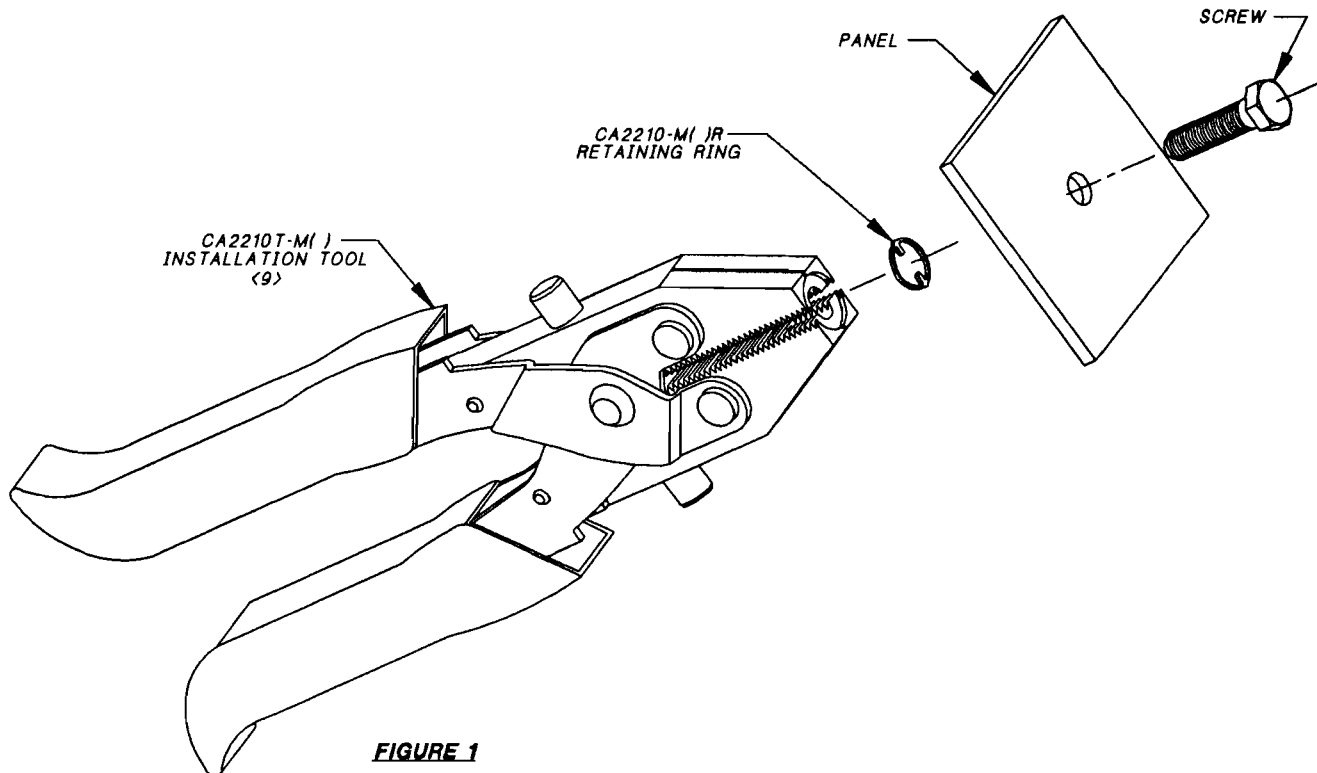


FIGURE 1

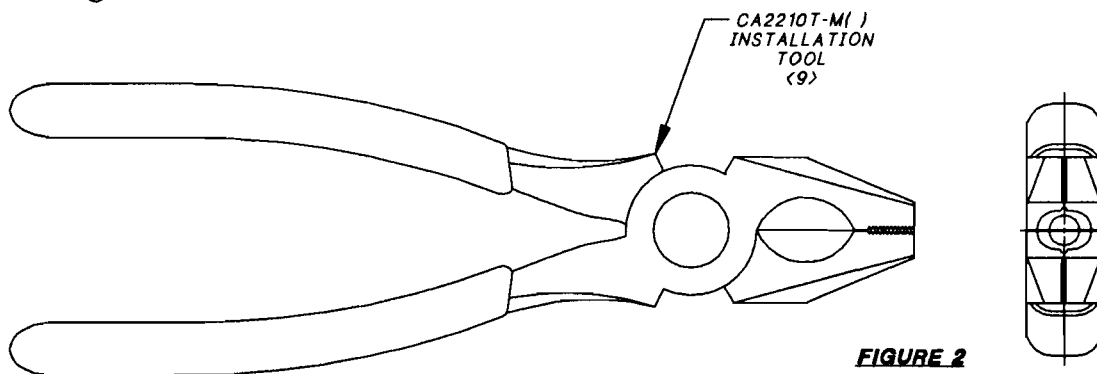


FIGURE 2

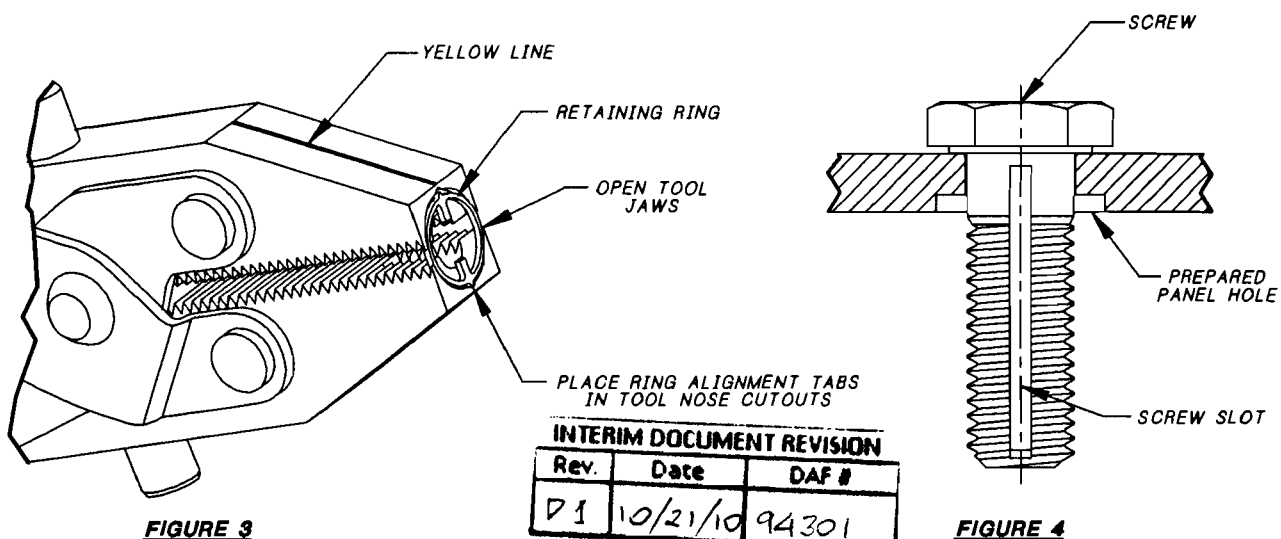


FIGURE 3

FIGURE 4

INTERIM DOCUMENT REVISION

Rev.	Date	DAF #
D1	10/21/10	94301

PROJECT NUMBER: 92-114, 96-137

APPROVED DATE	15 JAN 92
REV. LETTER AND DATE	<del>D</del> 12 DEC 96
ECN NUMBER	<del>EDN 09528</del>

**Fairchild** AEROSPACE FASTENER DIVISION  
 ENGINEERING CENTER  
 3000 WEST LOMITA BOULEVARD  
 TORRANCE, CA 90505


INSTALLATION, CRIMP-ON  
 RETAINING RINGS,  
 METRIC SIZES

CAGE CODE **29372**  
 TRIDAIR PRODUCT


**CA2210T-M()**  
 SHEET 1 OF 2

SCANNED-1

Voi-Shan • Tridair • Scrawcorp

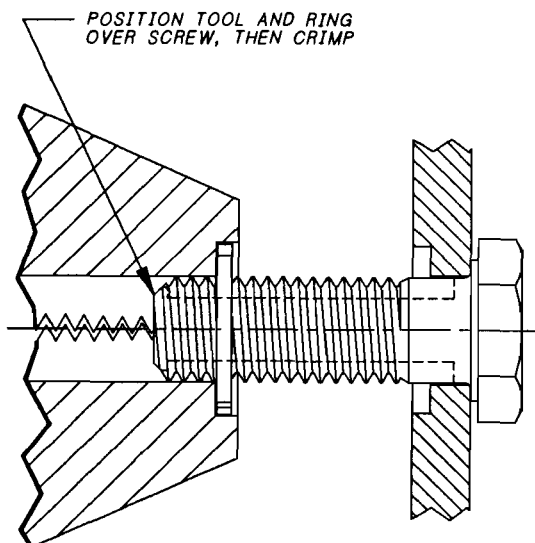

**FIGURE 5**

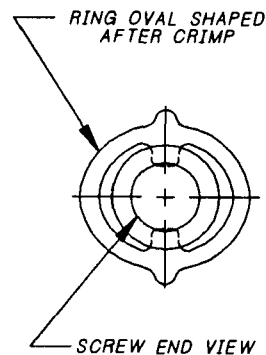

**FIGURE 6**

**INSTALLATION PROCEDURE**

1. INSERT THE SCREW IN A PANEL HOLE PREPARED IN ACCORDANCE WITH CAL-STD-0273. SEE FIGURE 4.
2. PLACE THE RETAINING RING IN THE TOOL NOSE AS SHOWN IN FIGURE 3. NOTE THE RING ALIGNMENT TAB PLACEMENT. SQUEEZE THE TOOL ONLY ENOUGH TO HOLD THE RING IN PLACE. "DO NOT CRIMP"
3. ALIGN THE YELLOW LINES ON THE TOOL JAWS WITH THE SCREW SHANK SLOTS AND PLACE THE TOOL OVER THE SCREW THREADS AS SHOWN IN FIGURE 5 (THE RING WILL NOT ALLOW THE SCREW TO ENTER THE TOOL UNLESS THE INTERNAL RING TANGS ARE ALIGNED WITH THE SCREW SLOTS).
4. CRIMP THE RING INTO THE SCREW SLOTS UNTIL THE TOOL JAWS SHUT. IT IS NOT NECESSARY TO SQUEEZE TIGHTLY ONCE THE TOOL JAWS ARE SHUT. SEE FIGURE 6.
5. OPEN THE TOOL JAWS AND REMOVE THE TOOL FROM THE SCREW. CHECK FOR PROPER CRIMP BY PULLING ON THE RING WITH FINGERS. THE RING SHOULD NOT COME OFF THE SCREW. RE-CRIMP, IF NECESSARY.
6. CAUTION:  
KEEP THE TOOL JAWS AND NOSE AREA CLEAN AND UNDAMAGED. DEBRIS OR DAMAGE TO TOOL NOSE AREA OR JAWS MAY PREVENT PROPER RING CRIMPING.

<8> RETAINING RING AND INSTALLATION TOOL ARE ALSO USED WITH #6-32 INCH SIZE SCREWS.

<9> INSTALLATION TOOL NUMBER CA2210T-M( ) WAS CHANGED FROM FIGURE 1 TO LOOK LIKE THE PICTURE ON FIGURE 2. TOOLS ORDERED WILL BE SUPPLIED WITH THE PICTURE ON FIGURE 1 UNTIL PRESENT INVENTORIES ARE EXHAUSTED, AFTER WHICH ALL SHIPMENTS WILL HAVE THE TOOL ON FIGURE 2 ONLY.

USE INSTALLATION TOOL NUMBER	RETAINING RING PART NUMBER	SCREW THREAD SIZE REF
<8> CA2210T-06	<8> CA2210-06R	M3.5x0.6-6g
CA2210T-M4	CA2210-M4R	M4x0.7-6g
CA2210T-M5	CA2210-M5R	M5x0.8-6g
CA2210T-M6	CA2210-M6R	M6x1-6g

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
D1	10/21/10	94301

PROJECT NUMBER: 92-114, 96-137

APPROVED DATE	15 JAN 92
REV. LETTER AND DATE	<del>D</del> 12 DEC 96
ECN NUMBER	<del>ECN 99528</del>

**Fairchild** AEROSPACE FASTENER DIVISION  
**ENGINEERING CENTER**  
 3000 WEST LOMITA BOULEVARD  
 TORRANCE, CA 90505

**INSTALLATION, CRIMP-ON  
 RETAINING RINGS,  
 METRIC SIZES**

CAGE CODE **29372**  
 TRIDAIR PRODUCT

**CA2210T-M( )**  
 SHEET 2 OF 2

SCANNED