


TABLE 1

FIRST DASH NUMBER	THREAD SIZE	A HEX	B REF	C	D DIA	F	H MAX	J	K	M MIN	N MIN	R RAD	ULTIMATE TENSILE STRENGTH MIN (CALCULATED)	ULTIMATE DOUBLE SHEAR STRENGTH MIN (CALCULATED)
-10	.190-32UNJF-3A	.314 .305	.348	.310 .300	.1895 .1885	.030	.050	.141	.040	.077	.108	.020 .010	2,425 LBS	2,900 LBS
-4	.250-28UNJF-3A	.376 .367	.410	.380 .370	.2495 .2485	.035	.050	.156	.040	.090	.162	.020 .010	4,625 LBS	5,550 LBS
-5	.3125-24UNJF-3A	.500 .489	.545	.460 .450	.3120 .3115	.040	.065	.188	.050	.120	.205	.020 .010	7,400 LBS	8,850 LBS
-6	.375-24UNJF-3A	.562 .551	.614	.460 .450	.3745 .3740	.040	.065	.312	.050	.182	.268	.025 .015	11,300 LBS	14,600 LBS

NOTES, UNLESS OTHERWISE SPECIFIED:

- MATERIAL: A286 CRES PER AMS5731, AMS5737.
- HEAT TREAT: PER AMS5737, AGE ONLY, TO ACHIEVE 160,000 PSI MINIMUM TENSILE.
- FINISH: STANDARD - PASSIVATE PER AMS-QQ-P-35.
OPTIONAL - DRY FILM LUBRICANT PER AS5272, TYPE 1 (IAW 80EING MUA NUMBER 1001-0036) DESIGNED BY LETTER "D" IN LIEU OF 1ST DASH.
OPTIONAL - CADMIUM PLATE PER AMS-QQ-P-416 TYPE II, CLASS 2 DESIGNATED BY LETTER "C" IN LIEU OF FIRST DASH. (SEE EXAMPLE: NOTE 7).
- SCREW TO BE USED WITH CA2210-() R RETAINING RING TO CAPTIVATE TO PANEL.
- PANEL PREPARATION: REFER TO CAL-STD-0260 DRAWING.
- INSTALLATION: REFER TO CA2210T-() DRAWING.

7. PART CALLOUT EXAMPLES:

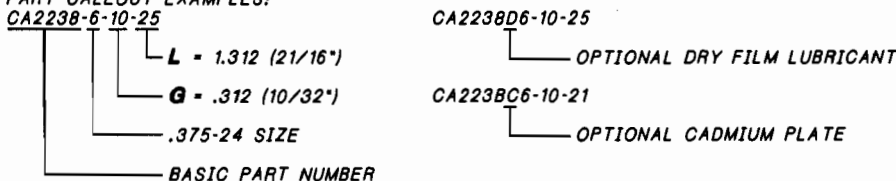

- TOLERANCES, UNLESS OTHERWISE SPECIFIED: .XX ±.02, .XXX ±.010, ANGLES ±2°.
- UNLESS OTHERWISE SPECIFIED, MANUFACTURING AND QUALITY ASSURANCE SHALL BE IN ACCORDANCE WITH NAS 4003.
- LONGER GRIPS (IN 1/32" INCREMENTS) AND LONGER LENGTHS (IN 1/16" INCREMENTS) THAN ARE SHOWN IN TABLES 2 THRU 6 MAY BE ORDERED.

SCANNED

INTERIM DOCUMENT REVISION		DAF #
Rev.	Date	94301
61	10/21/10	

PROJECT NUMBER 00-016, 04-040

APPROVED DATE 11 SEP 91	FAIRCHILD FASTENERS ENGINEERING CENTER 3000 WEST LOMITA BOULEVARD TORRANCE, CA 90505	CAGE CODE 29372 TRIDAIR PRODUCT
REV. LETTER AND DATE 6 OCT 04		SCREW, CAPTIVE, HEX HEAD, CRES. 160 KSI
DAF NUMBER DAF 83061		SHEET 1 OF 3

Voi-Shan • Tridair • Sorewoorp

TABLE 2

	G GRIP									L
	.062	.094	.125	.156	.187	.218	.250	.281	.312	LENGTH
.190-32 SIZE FIRST DASH NO.-10	-2-9	-3-9	-4-9	-5-9	-6-9	-7-9	-8-9	-9-9	-10-9	.562
	-2-10	-3-10	-4-10	-5-10	-6-10	-7-10	-8-10	-9-10	-10-10	.625
	-2-11	-3-11	-4-11	-5-11	-6-11	-7-11	-8-11	-9-11	-10-11	.687
	-2-12	-3-12	-4-12	-5-12	-6-12	-7-12	-8-12	-9-12	-10-12	.750
	-2-13	-3-13	-4-13	-5-13	-6-13	-7-13	-8-13	-9-13	-10-13	.812
	-2-14	-3-14	-4-14	-5-14	-6-14	-7-14	-8-14	-9-14	-10-14	.875
	-2-15	-3-15	-4-15	-5-15	-6-15	-7-15	-8-15	-9-15	-10-15	.937
	-2-16	-3-16	-4-16	-5-16	-6-16	-7-16	-8-16	-9-16	-10-16	1.000
	-2-17	-3-17	-4-17	-5-17	-6-17	-7-17	-8-17	-9-17	-10-17	1.062
	-2-18	-3-18	-4-18	-5-18	-6-18	-7-18	-8-18	-9-18	-10-18	1.125
	-2-19	-3-19	-4-19	-5-19	-6-19	-7-19	-8-19	-9-19	-10-19	1.187
	-2-20	-3-20	-4-20	-5-20	-6-20	-7-20	-8-20	-9-20	-10-20	1.250
	-2-21	-3-21	-4-21	-5-21	-6-21	-7-21	-8-21	-9-21	-10-21	1.312
	-2-22	-3-22	-4-22	-5-22	-6-22	-7-22	-8-22	-9-22	-10-22	1.375
	-2-23	-3-23	-4-23	-5-23	-6-23	-7-23	-8-23	-9-23	-10-23	1.437
	-2-24	-3-24	-4-24	-5-24	-6-24	-7-24	-8-24	-9-24	-10-24	1.500
	-2-25	-3-25	-4-25	-5-25	-6-25	-7-25	-8-25	-9-25	-10-25	1.562
	-2-26	-3-26	-4-26	-5-26	-6-26	-7-26	-8-26	-9-26	-10-26	1.625
	-2-27	-3-27	-4-27	-5-27	-6-27	-7-27	-8-27	-9-27	-10-27	1.687
	-2-28	-3-28	-4-28	-5-28	-6-28	-7-28	-8-28	-9-28	-10-28	1.750

TABLE 3

	G GRIP									L
	.062	.094	.125	.156	.187	.218	.250	.281	.312	LENGTH
.250-28 SIZE FIRST DASH NO.-4	-2-10	-3-10	-4-10	-5-10	-6-10	-7-10	-8-10	-9-10	-10-10	.625
	-2-11	-3-11	-4-11	-5-11	-6-11	-7-11	-8-11	-9-11	-10-11	.687
	-2-12	-3-12	-4-12	-5-12	-6-12	-7-12	-8-12	-9-12	-10-12	.750
	-2-13	-3-13	-4-13	-5-13	-6-13	-7-13	-8-13	-9-13	-10-13	.812
	-2-14	-3-14	-4-14	-5-14	-6-14	-7-14	-8-14	-9-14	-10-14	.875
	-2-15	-3-15	-4-15	-5-15	-6-15	-7-15	-8-15	-9-15	-10-15	.937
	-2-16	-3-16	-4-16	-5-16	-6-16	-7-16	-8-16	-9-16	-10-16	1.000
	-2-17	-3-17	-4-17	-5-17	-6-17	-7-17	-8-17	-9-17	-10-17	1.062
	-2-18	-3-18	-4-18	-5-18	-6-18	-7-18	-8-18	-9-18	-10-18	1.125
	-2-19	-3-19	-4-19	-5-19	-6-19	-7-19	-8-19	-9-19	-10-19	1.187
	-2-20	-3-20	-4-20	-5-20	-6-20	-7-20	-8-20	-9-20	-10-20	1.250
	-2-21	-3-21	-4-21	-5-21	-6-21	-7-21	-8-21	-9-21	-10-21	1.312
	-2-22	-3-22	-4-22	-5-22	-6-22	-7-22	-8-22	-9-22	-10-22	1.375
	-2-23	-3-23	-4-23	-5-23	-6-23	-7-23	-8-23	-9-23	-10-23	1.437
	-2-24	-3-24	-4-24	-5-24	-6-24	-7-24	-8-24	-9-24	-10-24	1.500
	-2-25	-3-25	-4-25	-5-25	-6-25	-7-25	-8-25	-9-25	-10-25	1.562
	-2-26	-3-26	-4-26	-5-26	-6-26	-7-26	-8-26	-9-26	-10-26	1.625
	-2-27	-3-27	-4-27	-5-27	-6-27	-7-27	-8-27	-9-27	-10-27	1.687
	-2-28	-3-28	-4-28	-5-28	-6-28	-7-28	-8-28	-9-28	-10-28	1.750

SCANNED

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
61	10/21/10	94301

PROJECT NUMBER 00-016, 04-040
542865

APPROVED DATE	 FAIRCHILD FASTENERS ENGINEERING CENTER 3000 WEST LOMITA BOULEVARD TORRANCE, CA 90505	CAGE CODE 29372	
11 SEP 91		TRIDAIR PRODUCT	
REV. LETTER AND DATE	SCREW, CAPTIVE, HEX HEAD, CRES. 160 KSI	CA2238-()-()-()	
G 0 OCT 04 B			SHEET 2 OF 3
DAF NUMBER			
DAF 03001			

Voi-Shan • Tridair • Sorewoorp

TABLE 4

.3125-24 SIZE FIRST DASH NO.-5	G GRIP									L
	.062	.094	.125	.156	.187	.218	.250	.281	.312	LENGTH
-2-10	-3-10	-4-10	-5-10	-6-10	-7-10	-8-10	-9-10	-10-10	.625	
-2-11	-3-11	-4-11	-5-11	-6-11	-7-11	-8-11	-9-11	-10-11	.687	
-2-12	-3-12	-4-12	-5-12	-6-12	-7-12	-8-12	-9-12	-10-12	.750	
-2-13	-3-13	-4-13	-5-13	-6-13	-7-13	-8-13	-9-13	-10-13	.812	
-2-14	-3-14	-4-14	-5-14	-6-14	-7-14	-8-14	-9-14	-10-14	.875	
-2-15	-3-15	-4-15	-5-15	-6-15	-7-15	-8-15	-9-15	-10-15	.937	
-2-16	-3-16	-4-16	-5-16	-6-16	-7-16	-8-16	-9-16	-10-16	1.000	
-2-17	-3-17	-4-17	-5-17	-6-17	-7-17	-8-17	-9-17	-10-17	1.062	
-2-18	-3-18	-4-18	-5-18	-6-18	-7-18	-8-18	-9-18	-10-18	1.125	
-2-19	-3-19	-4-19	-5-19	-6-19	-7-19	-8-19	-9-19	-10-19	1.187	
-2-20	-3-20	-4-20	-5-20	-6-20	-7-20	-8-20	-9-20	-10-20	1.250	
-2-21	-3-21	-4-21	-5-21	-6-21	-7-21	-8-21	-9-21	-10-21	1.312	
-2-22	-3-22	-4-22	-5-22	-6-22	-7-22	-8-22	-9-22	-10-22	1.375	
-2-23	-3-23	-4-23	-5-23	-6-23	-7-23	-8-23	-9-23	-10-23	1.437	
-2-24	-3-24	-4-24	-5-24	-6-24	-7-24	-8-24	-9-24	-10-24	1.500	
-2-25	-3-25	-4-25	-5-25	-6-25	-7-25	-8-25	-9-25	-10-25	1.562	
-2-26	-3-26	-4-26	-5-26	-6-26	-7-26	-8-26	-9-26	-10-26	1.625	
-2-27	-3-27	-4-27	-5-27	-6-27	-7-27	-8-27	-9-27	-10-27	1.687	
-2-28	-3-28	-4-28	-5-28	-6-28	-7-28	-8-28	-9-28	-10-28	1.750	

SCANNED

TABLE 5

.375-24 SIZE FIRST DASH NO.-6	G GRIP									L
	.062	.094	.125	.156	.187	.218	.250	.281	.312	LENGTH
-2-10	-3-10	-4-10	-5-10	-6-10	-7-10	-8-10	-9-10	-10-10	.625	
-2-11	-3-11	-4-11	-5-11	-6-11	-7-11	-8-11	-9-11	-10-11	.687	
-2-12	-3-12	-4-12	-5-12	-6-12	-7-12	-8-12	-9-12	-10-12	.750	
-2-13	-3-13	-4-13	-5-13	-6-13	-7-13	-8-13	-9-13	-10-13	.812	
-2-14	-3-14	-4-14	-5-14	-6-14	-7-14	-8-14	-9-14	-10-14	.875	
-2-15	-3-15	-4-15	-5-15	-6-15	-7-15	-8-15	-9-15	-10-15	.937	
-2-16	-3-16	-4-16	-5-16	-6-16	-7-16	-8-16	-9-16	-10-16	1.000	
-2-17	-3-17	-4-17	-5-17	-6-17	-7-17	-8-17	-9-17	-10-17	1.062	
-2-18	-3-18	-4-18	-5-18	-6-18	-7-18	-8-18	-9-18	-10-18	1.125	
-2-19	-3-19	-4-19	-5-19	-6-19	-7-19	-8-19	-9-19	-10-19	1.187	
-2-20	-3-20	-4-20	-5-20	-6-20	-7-20	-8-20	-9-20	-10-20	1.250	
-2-21	-3-21	-4-21	-5-21	-6-21	-7-21	-8-21	-9-21	-10-21	1.312	
-2-22	-3-22	-4-22	-5-22	-6-22	-7-22	-8-22	-9-22	-10-22	1.375	
-2-23	-3-23	-4-23	-5-23	-6-23	-7-23	-8-23	-9-23	-10-23	1.437	
-2-24	-3-24	-4-24	-5-24	-6-24	-7-24	-8-24	-9-24	-10-24	1.500	
-2-25	-3-25	-4-25	-5-25	-6-25	-7-25	-8-25	-9-25	-10-25	1.562	
-2-26	-3-26	-4-26	-5-26	-6-26	-7-26	-8-26	-9-26	-10-26	1.625	
-2-27	-3-27	-4-27	-5-27	-6-27	-7-27	-8-27	-9-27	-10-27	1.687	
-2-28	-3-28	-4-28	-5-28	-6-28	-7-28	-8-28	-9-28	-10-28	1.750	

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
61	10/21/10	94301

PROJECT NUMBER 00-016, 04-040
542665

APPROVED DATE 11 SEP 91	 FAIRCHILD FASTENERS ENGINEERING CENTER 3000 WEST LOMITA BOULEVARD TORRANCE, CA 90505	CAGE CODE 29372 TRIDAIR PRODUCT
REV. LETTER AND DATE G 8 OCT 04		SCREW, CAPTIVE, HEX HEAD, CRES. 160 KSI
DAF NUMBER DAF 03001		