


Voi-Shan • Tridair • Screwcorp

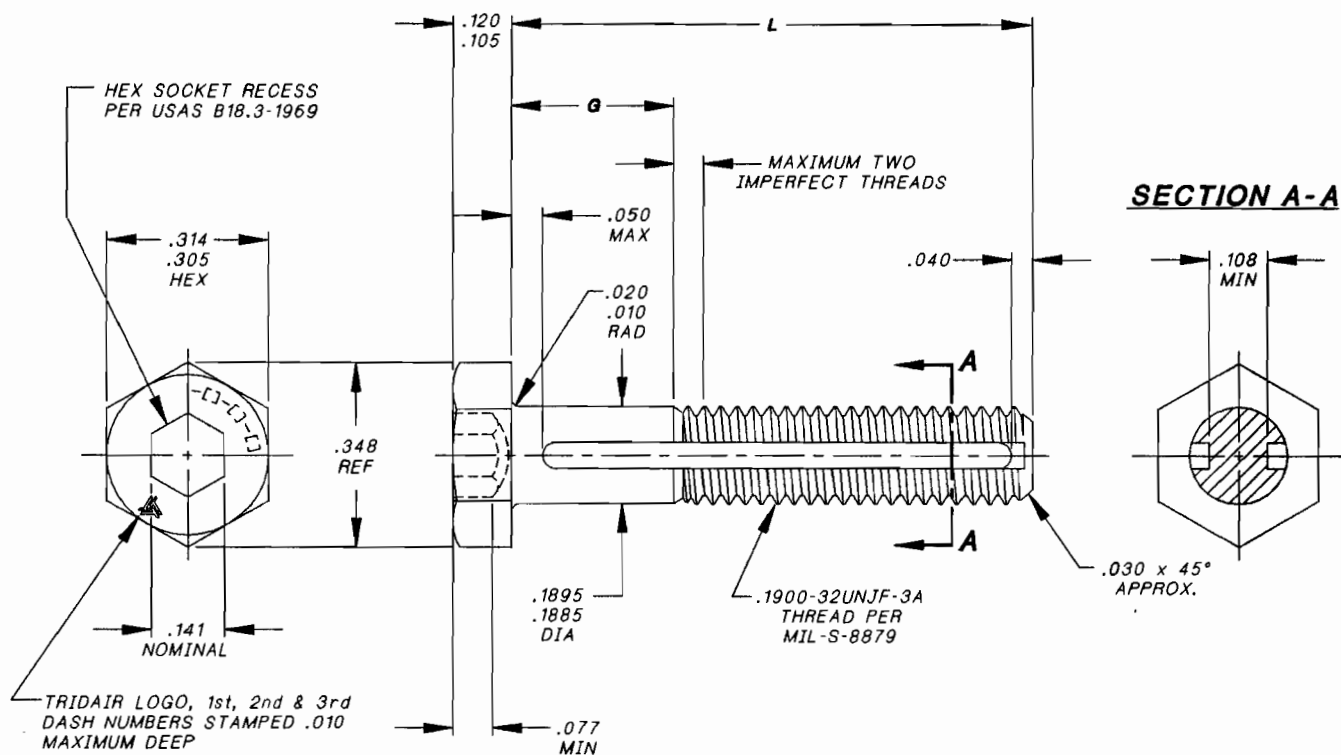

TRIDAIR LOGO, 1st, 2nd & 3rd DASH NUMBERS STAMPED .010 MAXIMUM DEEP

G GRIP									L
.062	.094	.125	.156	.187	.218	.250	.281	.312	LENGTH
-2-7	-3-7	-4-7	-5-7	-6-7	-7-7	-8-7	-9-7	-10-7	.437
-2-8	-3-8	-4-8	-5-8	-6-8	-7-8	-8-8	-9-8	-10-8	.500
-2-9	-3-9	-4-9	-5-9	-6-9	-7-9	-8-9	-9-9	-10-9	.562
-2-10	-3-10	-4-10	-5-10	-6-10	-7-10	-8-10	-9-10	-10-10	.625
-2-11	-3-11	-4-11	-5-11	-6-11	-7-11	-8-11	-9-11	-10-11	.687
-2-12	-3-12	-4-12	-5-12	-6-12	-7-12	-8-12	-9-12	-10-12	.750
-2-13	-3-13	-4-13	-5-13	-6-13	-7-13	-8-13	-9-13	-10-13	.812
-2-14	-3-14	-4-14	-5-14	-6-14	-7-14	-8-14	-9-14	-10-14	.875
-2-15	-3-15	-4-15	-5-15	-6-15	-7-15	-8-15	-9-15	-10-15	.937
-2-16	-3-16	-4-16	-5-16	-6-16	-7-16	-8-16	-9-16	-10-16	1.000
-2-17	-3-17	-4-17	-5-17	-6-17	-7-17	-8-17	-9-17	-10-17	1.062
-2-18	-3-18	-4-18	-5-18	-6-18	-7-18	-8-18	-9-18	-10-18	1.125
-2-19	-3-19	-4-19	-5-19	-6-19	-7-19	-8-19	-9-19	-10-19	1.187
-2-20	-3-20	-4-20	-5-20	-6-20	-7-20	-8-20	-9-20	-10-20	1.250
-2-21	-3-21	-4-21	-5-21	-6-21	-7-21	-8-21	-9-21	-10-21	1.312
-2-22	-3-22	-4-22	-5-22	-6-22	-7-22	-8-22	-9-22	-10-22	1.375
-2-23	-3-23	-4-23	-5-23	-6-23	-7-23	-8-23	-9-23	-10-23	1.437
-2-24	-3-24	-4-24	-5-24	-6-24	-7-24	-8-24	-9-24	-10-24	1.500
-2-25	-3-25	-4-25	-5-25	-6-25	-7-25	-8-25	-9-25	-10-25	1.562
-2-26	-3-26	-4-26	-5-26	-6-26	-7-26	-8-26	-9-26	-10-26	1.625
-2-27	-3-27	-4-27	-5-27	-6-27	-7-27	-8-27	-9-27	-10-27	1.687
-2-28	-3-28	-4-28	-5-28	-6-28	-7-28	-8-28	-9-28	-10-28	1.750

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
N/A	10/21/10	94301

PROJECT NUMBER: 93-121

APPROVED DATE
5 MAR 93
REV. LETTER AND DATE
5 MAR 93
ECN NUMBER
ECN 32723

Fairchild AEROSPACE FASTENER DIVISION
 ENGINEERING CENTER
 3000 WEST LOMITA BOULEVARD
 TORRANCE, CA 90505

CAGE CODE **92215**
 TRIDAIR PRODUCT

SCREW, HEX HEAD,
 CAPTIVE, CRES,
 #10-32 SIZE, MILLED SLOTS

CA2287-10-(-)-(-)


SHEET 1 OF 2

SCANNED

NOTES:

1. MATERIAL: A286 CRES PER AMS5731, AMS5737.
 2. HEAT TREAT: PER AMS5737, AGE ONLY, TO ACHIEVE 160,000 PSI MINIMUM TENSILE.
 3. FINISH: PASSIVATE PER QQ-P-35.
 4. SCREW TO BE USED WITH CA2210-() JR RETAINING RING TO CAPTIVATE TO PANEL.
 5. PANEL PREPARATION: REFER TO CAL-STD-0260 DRAWING.
 6. INSTALLATION: REFER TO CA2210T-() DRAWING.
 7. MECHANICAL STRENGTHS (CALCULATED):
 - 7.1 ULTIMATE TENSILE; 2,425 LBS MINIMUM.
 - 7.2 ULTIMATE DOUBLE SHEAR: 2,900 LBS MINIMUM.
 8. RECOMMENDED SEATING TORQUE: 37 TO 57 INCH-LBS.
 9. UNLESS OTHERWISE SPECIFIED, MANUFACTURING AND QUALITY ASSURANCE SHALL BE IN ACCORDANCE WITH NAS4003.
- [REDACTED]
11. TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS .XX±.02, .XXX ±.010, ANGLES ±2°.

12. PART CALLOUT EXAMPLE:

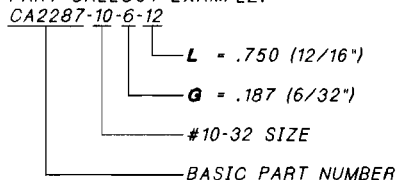

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
1/2/1	10/21/10	94301

PROJECT NUMBER: 93-121

APPROVED DATE	5 MAR 93
REV. LETTER AND DATE	5 MAR 93
ECN NUMBER	ECN 32723

Fairchild AEROSPACE FASTENER DIVISION
ENGINEERING CENTER
 3000 WEST LOMITA BOULEVARD
 TORRANCE, CA 90505

CAGE CODE **92215**
 TRIDAIR PRODUCT

**SCREW, HEX HEAD,
 CAPTIVE, CRES,
 #10-32 SIZE, MILLED SLOTS**

CA2287-10-()-()
 SHEET 2 OF 2

SCANNED