



Camloc . Delron . Deutsch . Huck . K-Fast . Kaynar . Microdot . RAM . Rosan . Screwcorp . Tridair . Voi-Shan

MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN CONSENT OF ALCOA FASTENING SYSTEMS IS ABSOLUTELY PROHIBITED.

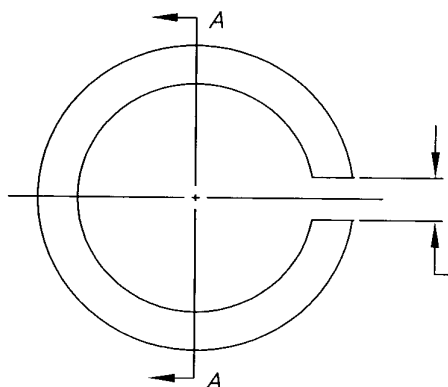

.08 MAXIMUM GAP WHEN MOUNTED ON .456-.457 DIAMETER MANDREL

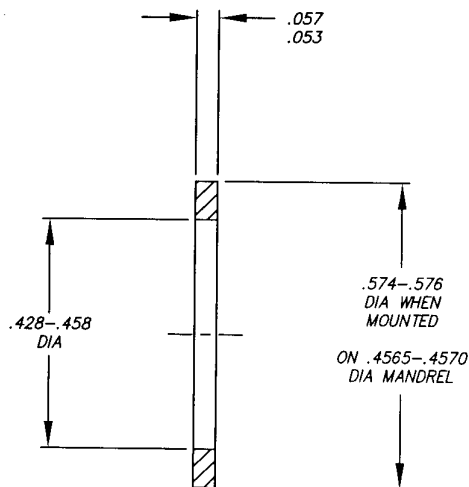


SECTION A-A

NOTES, UNLESS OTHERWISE SPECIFIED:

1. MATERIAL:
 - 1.1 SPRING STEEL WIRE. ASTM A227
2. HEAT TREAT:
 - 2.1 NONE
3. FINISH:
 - 3.1 CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2.
4. TOLERANCE, UNLESS OTHERWISE SPECIFIED: .XX ± .02, .XXX ± .010, ANGLE ± 1°.
5. FOR SNAP RING INSTALLATION DATA. SEE CAMLOC DRAWING 40F15.
6. WEIGHT: .15 LBS/100

THIS DRAWING EMBODIES A CONFIDENTIAL, PROPRIETARY DESIGN & ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

APPROVED DATE 5 NOV 50	Alcoa Fastening Systems  CAMLOC PRODUCTS 3012 WEST. LOMITA BLVD. TORRANCE, CA 90505	TITLE: RING - SNAP, SHEAR GROMMET	CURRENT DESIGN ACTIVITY: CAGE CODE: 7 1 2 8 6
REV. LETTER AND DATE G 16 JUL 07			SALES DRAWING NO.
DAF NUMBER 78767		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & ASME Y14.5M TOLERANCES:	ANGLES = ± 1° FRACTIONS = ± 1/32 DECIMALS .XX = ± .02 .XXX = ± .010