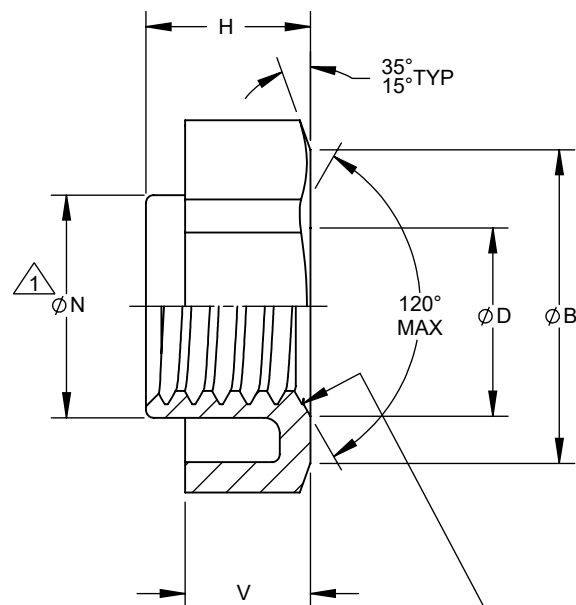
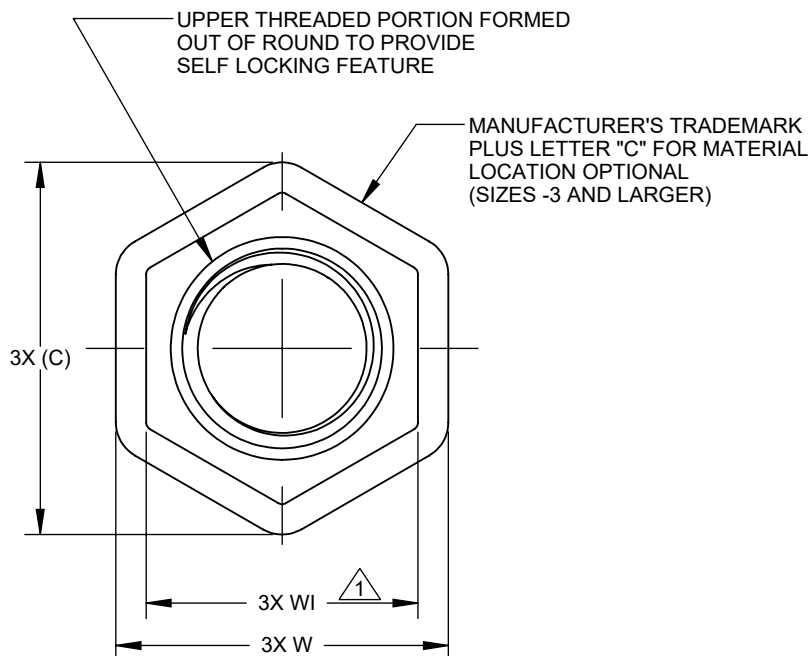
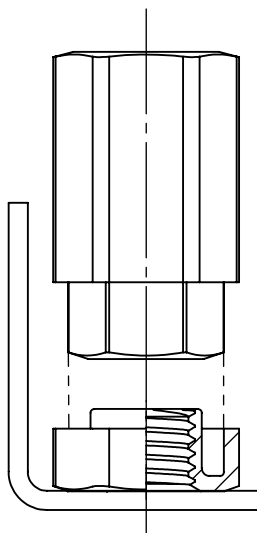


MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN
CONSENT OF ARCONIC FASTENING SYSTEMS IS ABSOLUTELY PROHIBITED.THIS DRAWING EMBODIES ARCONIC FASTENING SYSTEMS CONFIDENTIAL, PROPRIETARY DESIGN &
ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.C'SINK, C'BORE OR RADIUS OPTIONAL
WITHIN THE LIMITS OF "Ø D"INTERNAL OR EXTERNAL WRENCHING
FOR REDUCED SPOTFACE DIAMETERS.
WRENCH CLEARANCES AND
FLANGE WIDTHS

AFS PRODUCTS PART NO.		THREADS PER AS8879	Ø B MIN	(C)	Ø D	H MAX	Ø N MAX	V MIN	W	WI	MAXIMUM WEIGHT lbs/100
H01-	04	.1120-40UNJC-3B	.190	.289	.154 .112	.124	.150	.081	.252 .240	.200 .189	.13
	06	.1380-32UNJC-3B	.252	.361	.178 .138	.141	.179	.092	.314 .302	.246 .234	.23
	08	.1640-32UNJC-3B	.284	.390	.203 .173	.188	.209	.122	.346 .334	.274 .266	.28
	3	.1900-32UNJF-3B	.315	.430	.230 .199		.235		.377 .365	.305 .297	.35
	4	.2500-28UNJF-3B	.380	.506	.293 .259	.219	.302	.142	.439 .430	.357 .349	.53
	5	.3125-24UNJF-3B	.452	.580	.356 .322	.266	---	.173	.502 .492	---	.85
	6	.3750-24UNJF-3B	.523	.650	.418 .385	.282		.183	.564 .553		1.10
	7	.4375-20UNJF-3B	.629	.790	.482 .448	.328		.213	.690 .679		1.45

EAR EXPORT CONTROLLED TECHNICAL DATA: DISTRIBUTION LIMITED TO U.S. PERSONS OR THOSE NON-U.S. PERSONS
COVERED BY AN APPROPRIATE EXPORT LICENSE OR ALLOWED FOR BY THE APPROPRIATE REGULATIONS, ECCN: EAR99.

APPROVED DATE

31JUL2007

REV. LETTER AND DATE:

A 12MAR2018

CUSTOMER:

CURRENT DESIGN ACTIVITY:

**ARCONIC**Arconic Fastening Systems
Fullerton Operations
800 S State College Boulevard
Fullerton, California, 92831<http://www.arconic.com>

TITLE:



NUT - HEX,
SELF-LOCKINGUNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE
IN INCHES & TO ASME Y14.5-2009 TOLERANCES:
DECIMALS = ±.015; ANGLES = ±2°**CAGE CODE: 15653****SALES DRAWING No.****H01-(*)****PAGE 1 OF 3**

FILED AS:

s_H01-(*)

MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN CONSENT OF ARCONIC FASTENING SYSTEMS IS ABSOLUTELY PROHIBITED.

THIS DRAWING EMBODIES ARCONIC FASTENING SYSTEMS CONFIDENTIAL, PROPRIETARY DESIGN & ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

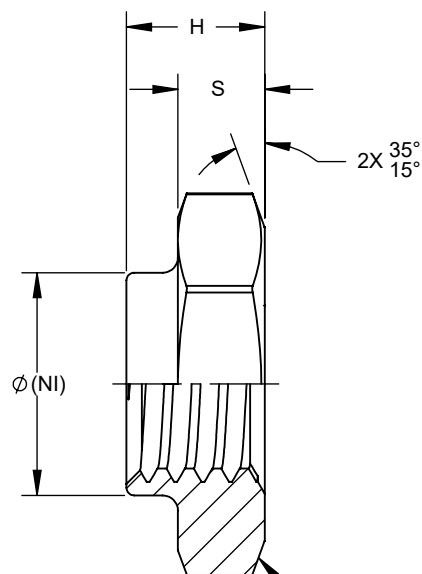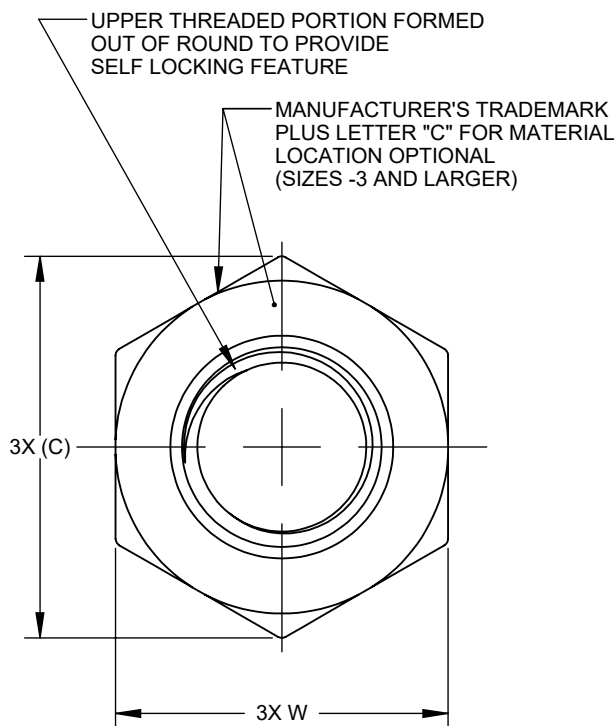

AFS PRODUCTS PART NO.		THREADS PER AS8879	(C)	H	Ø (NI)	S	W
				MAX			
H01-	8	.5000-20UNJF-3B	.837	.328	.573	.160	.752 .740
	9	.5625-18UNJF-3B	1.010	.375	.646	.200	.877 .865
	10	.6250-18UNJF-3B	1.080	.407	.718	.218	.940 .928
	12	.7500-16UNJF-3B	1.191	.422	.853	.213	1.064 1.052
	14	.8750-14UNJF-3B	1.440	.485	.968	.262	1.252 1.239
	16	1.0000-14UNS-3B	1.660	.578	1.123	.319	1.440 1.427
	1612	1.0000-12UNJF-3B					
	18	1.1250-12UNJF-3B	1.880	.672	1.258	.463	1.627 1.614
	20	1.2500-12UNJF-3B	2.038	.766	1.383	.507	1.817 1.801



EAR EXPORT CONTROLLED TECHNICAL DATA: DISTRIBUTION LIMITED TO U.S. PERSONS OR THOSE NON-U.S. PERSONS COVERED BY AN APPROPRIATE EXPORT LICENSE OR ALLOWED FOR BY THE APPROPRIATE REGULATIONS, ECCN: EAR99.

APPROVED DATE

31JUL2007

REV. LETTER AND DATE:

A 12MAR2018

CUSTOMER:

CURRENT DESIGN ACTIVITY:



ARCONIC

Arconic Fastening Systems
Fullerton Operations
800 S State College Boulevard
Fullerton, California, 92831

<http://www.arconic.com>

TITLE:

NUT - HEX,
SELF-LOCKING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE
IN INCHES & TO ASME Y14.5-2009 TOLERANCES:
DECIMALS = ±.015; ANGLES = ±2°

CAGE CODE: 15653

SALES DRAWING No.

H01-(*)

MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN
CONSENT OF ARCONIC FASTENING SYSTEMS IS ABSOLUTELY PROHIBITED.THIS DRAWING EMBODIES ARCONIC FASTENING SYSTEMS CONFIDENTIAL, PROPRIETARY DESIGN &
ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

MATERIAL: H01-04 THRU H01-7:
A286 CORROSION RESISTANT STEEL PER AMS5525 (UNS S66286).
H01-8 AND LARGER:
A286 CORROSION RESISTANT STEEL PER AMS5732 (UNS S66286).

FINISH: H01-(*):
PASSIVATE PER AMS2700.
DRY FILM LUBRICANT COAT PER AS5272, TYPE I.
H01-(*):NF:
PASSIVATE PER AMS2700.

PERFORMANCE: NASM25027.

- NOTES:  1. DIMENSIONS N AND WI APPLICABLE TO INTERNAL WRENCHING TYPE.
2. MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH OF 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR PER ASTM A342/A342M, TEST METHOD 3 OR EQUIVALENT.
3. REMOVE ALL BURRS AND SHARP EDGES.



EAR EXPORT CONTROLLED TECHNICAL DATA: DISTRIBUTION LIMITED TO U.S. PERSONS OR THOSE NON-U.S. PERSONS COVERED BY AN APPROPRIATE EXPORT LICENSE OR ALLOWED FOR BY THE APPROPRIATE REGULATIONS, ECCN: EAR99.

APPROVED DATE

31JUL2007

REV. LETTER AND DATE:

A 12MAR2018

CUSTOMER:

CURRENT DESIGN ACTIVITY:

**ARCONIC**

Arconic Fastening Systems
Fullerton Operations
800 S State College Boulevard
Fullerton, California, 92831

<http://www.arconic.com>

TITLE:

NUT - HEX,
SELF-LOCKING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE
IN INCHES & TO ASME Y14.5-2009 TOLERANCES:
DECIMALS = ±.015; ANGLES = ±2°

CAGE CODE: 15653**SALES DRAWING No.****H01-(*)****PAGE 3 OF 3**

FILED AS:

s_H01-(*)