TABLE I		
CAT. PART NO.	DESCRIPTION	CALC WT
214-16B	PLAIN WELD TYPE MTG (NO HOLES)	.0404
214-16B-D	DIMPLED MTG HOLES	.0400
214-16B-P	PROJECTION WELD MTG ⚠	.0404
214-16B-R	PLAIN MTG HOLES	.0400

214-16B

REV.

STOCK	REV.	CHANGE

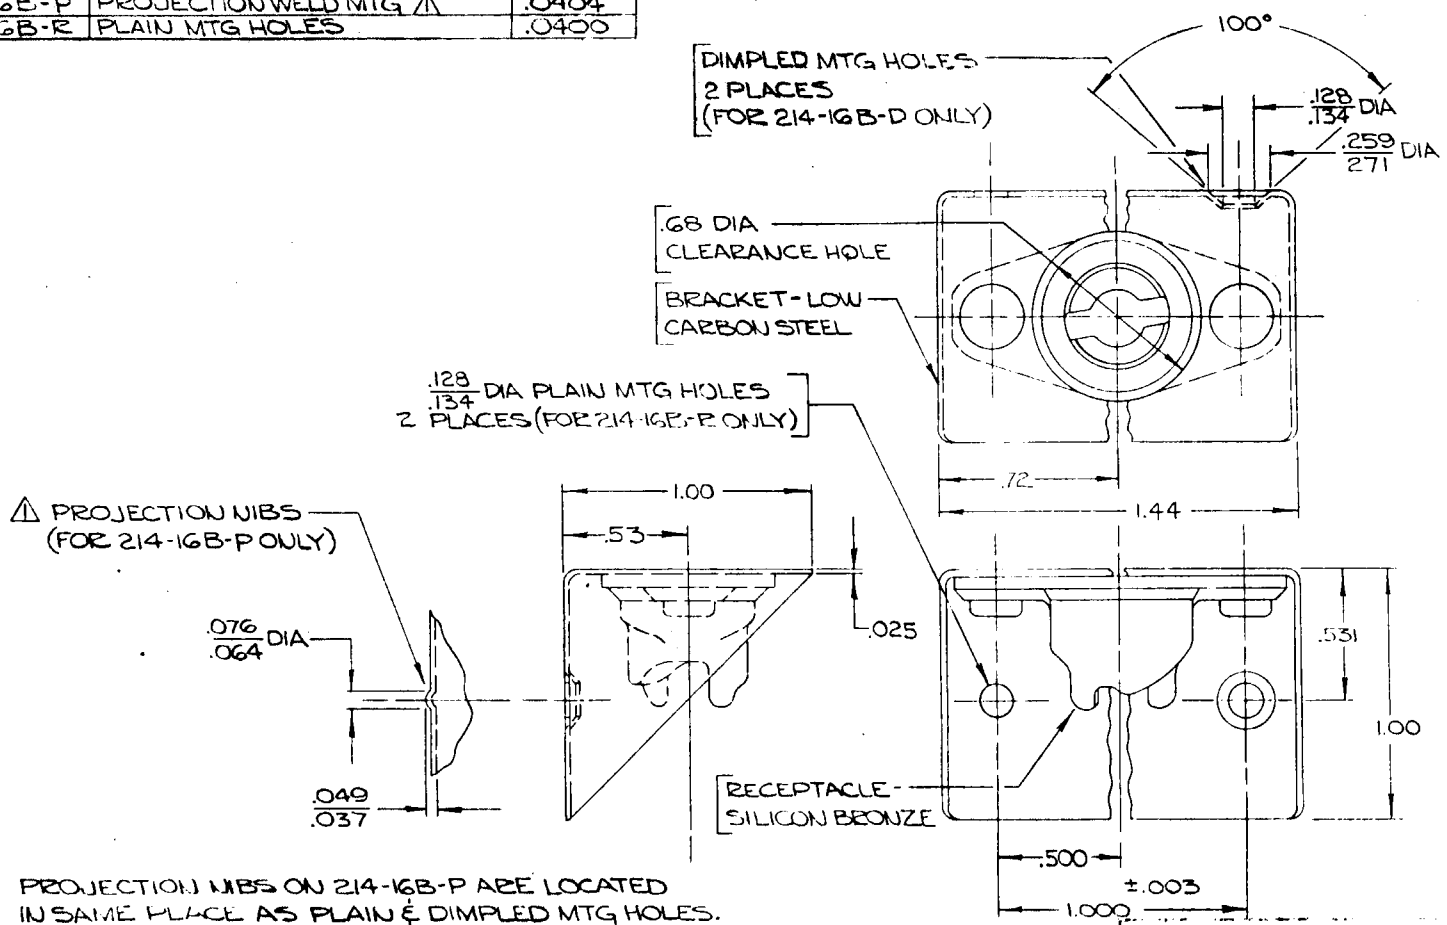

ACTUAL SIZE

⚠ 2. PROJECTION NIBS ON 214-16B-P ARE LOCATED IN SAME PLACE AS PLAIN & DIMPLED MTG HOLES.

1. PROCEDURE TO DETERMINE STUD SELECTION.
   A. TO FACTORS COMPRISING "G" (TOTAL GRIP THICKNESS) ADD .025.
   B. USING THE ABOVE TOTAL (G + .025), SELECT CORRECT STUD DASH NO. FROM 4002 SERIES STUD SELECTION CHART, CAMLOC CATALOG USING "A" COLUMNS ONLY.

NOTE:

Rexnord — We've changed our corporate name to Rexnord Inc

THIS DOCUMENT IS PROTECTED BY COMMON LAW COPYRIGHT. IS RECEIVED IN CONFIDENCE AND SHALL NOT BE REPRODUCED; USED OR DISSEMINATED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF CAMLOC FASTENER CORP.

FINISH: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS B	SCALE: 2:1	WEIGHT: SEE TABLE I
HEAT TREATMENT: NONE	DR. E. JOHNSON	6/2/55
MATERIAL: AS NOTED	CHK. WEICHERT	6-9-55
TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PLACE DEC. ± .02; 3 PLACE DEC. ± .010; ANG. ± 1°	ENGR. APP.	6-13-55
	SALES APP.	

CAMLOC FASTENER CORPORATION
PARAMUS, NEW JERSEY

TITLE: RECEPTACLE - RIGID, BRACKET TYPE

MODEL OR SERIES: 4000

DRAWING NO.: 214 16E

REV.